

Residential DC Linear Gate Operator

LA 400

24VDC-powered residential and light commercial linear gate operator

Powerful 24VDC motor provides exceptional starting torque and features soft start/soft stop operation. This promotes longer gate and operator life, as well as dependable performance. The LA400 is capable of operating gates up to 16 ft. long and weighing up to 550 pounds.

on-board radio receiver

Exclusive from Chamberlain, a single remote control solution for gates and additional access points.

safety, convenience, flexibility

- Low-voltage operator does not require an electrician and accommodates low-voltage wire run
- Battery-run system ensures full function during power outage
- Solar option
- Simple-to-set electronic limit system
- Easy-to-use inputs for loops, sensing devices and control devices
- Built-in fully adjustable timer to close
- Supports primary/secondary operation
- LED diagnostics to speed installation



CHAMBERLAIN

LiftMaster

PROFESSIONAL



2 year warranty

standard features

on-board radio receiver

Radio receiver compatible with all LiftMaster® Security+® and Passport™ 315 MHz remote controls. Allows for one remote control to conveniently open the gate and additional access points. Remote controls sold separately.

DC operator system

Powerful 24VDC motor provides exceptional starting torque and durability.

battery-run system

Provides complete operation of the gate operator, including all DC control devices and sensing devices.

slow start/stop

Reduces the stress and shock to a gate system during starting and stopping. This promotes longer gate and operator life and quieter operation.

inherent obstruction sensing

This unit's internal obstruction sensing system offers separate force adjustments for both the open and closed directions. If the gate strikes an obstruction, a closing gate will reverse to open and an opening gate will stop.

external obstruction sensing

Input connections are provided for external contact and non-contact sensors, such as photo-eyes and edge devices.

control inputs

Control inputs allow the connection of a full range of optional external devices like loop detectors, telephone entry systems, access control systems and radio receivers.

bi-part latch

Allows for swing gate designs where the wings overlap by letting one wing open before the other wing starts to open, or by letting one wing close before closing the other wing.

timer to close

Adjustable timer can be set from 0 to 120 seconds. The unit will automatically reset upon receiving any additional open commands.

LED indicators

Operator input, status and diagnostic LEDs simplify setup and troubleshooting.

electronic limit system

Simple-to-set electronic limit system allows you to set your limits with just the push of a button.

keyed manual disconnect

External system allows the user to manually operate the gate easily and efficiently during a power outage.

optional equipment

solar panel package*

Provides complete operation of the gate operator through the use of combined solar panel and battery system. Package includes 24V 10W solar panel, 10 ft. of power cable, mounting post and hardware. Operates up to 15 cycles a day on a full battery.



master/second package*

The LA400 is available in a Master/Second package which includes a cable extension kit consisting of 40 ft. of direct burial wire, junction box and connecting hardware. For use in applications where two gate operators are needed.



antenna package*

Allows you to put antenna in a more favorable position for optimal radio reception. 86LM package includes antenna, 15 ft. cable and mounting hardware.

push to open option*

Optional "push to open" bracket allows the gate to swing out from the property.

*Indicate option needed when ordering operator




The in-vehicle universal remote control.

RECOMMENDED CAPACITIES

Max. Gate Wt. (lbs.)	Max. Gate Width (ft.)	CYCLES / DAY
550	16	100

DIMENSIONS

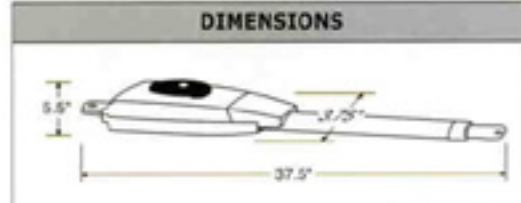

SPECIFICATIONS

OPERATOR SPEED
90° in 15 seconds

POWER REQUIREMENT
24VDC

DIMENSIONS
LA400 Linear Actuator Arm
Height: 5.5"
Length: 37.5"
Width: 3.75"
LA400 Controller Box
Height: 14"
Depth: 6"
Width: 9"

OPERATOR WEIGHT
LA400 Linear Actuator Arm: 25 lbs
LA400 Controller Box: 25 lbs

ACCESSORY POWER
Two/24VDC Outputs

UL LISTED
UL325-Class I, II, III, IV

CONSTRUCTION
Motor: 24VDC with thermal overload protection
aluminum housing

MODELS AVAILABLE
LA400 - Single linear actuator arm

LA400-CONT - Control box for single or master/second application

LA400-S - Second linear actuator arm with junction box and direct burial cable for all master/second applications

ADDITIONAL OPTIONS

U-BOLT MOUNTING KITS
50-19509 (6" post mount kit)
50-19511 (4" post mount kit)
50-19512 (2.5" post mount kit)

TRANSMITTERS AND KEYPADS

SOLENOID LOCK/MAGLOCK

LOOP DETECTORS

PHOTO-EYES


SENSING EDGES

CHAMBERLAIN™

LiftMaster

RESIDENTIAL

WAYSIDE ACCESS CONTROL
Gate Operators & Accessories
63 Third Ave. Bay Shore, NY 11706
(800) 847-7789 www.waysidefence.com



©2005 LM LA400 Spec 06/05
The Chamberlain Group, Inc.
Printed in U.S.A.