


IRON GUARD Superior Galvanized Coating



Iron World's industry leading galvanized clear coat process for fence framework:

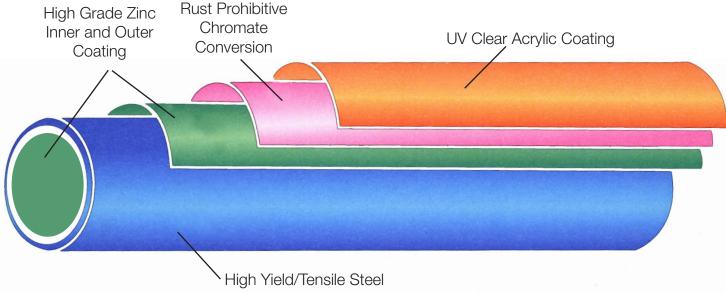

G-185 Galvanized Coating Available on Spec Pipe



Meets or exceeds the following requirements: ASTM F-1083, ASTM F-1043, ASTM A 500 Grade B and ASTM A 513



Hot dip galvanized and coated inside and out with high grade zinc for protection against corrosion and white rust



Extensive sizes available including $1^{3}/8^{0}$, $1^{5}/8^{0}$, 2^{0} , $2^{1}/2^{0}$, 3^{0} , 4^{0} and $6^{5}/8^{0}$





IRON GUARD Superior Galvanized Coating

FENCE OD	DECIMAL OD	GUAGE	STOCK LENGTHS	PCS/BDL
1 3/8"	1.315	18 (045)	6' to 24'	91
1 3/8"	1.315	17 (055)	6' to 24'	91
1 3/8"	1.315	16 (065)	6' to 24'	91
1 3/8"	1.315	IW (20)	6' to 24'	91
1 3/8"	1.315	IW (40)	6' to 24'	91
1 5/8"	1.660	18 (045)	6' to 24'	61
1 5/8"	1.660	17 (055)	6' to 24'	61
1 5/8"	1.660	16 (065)	6' to 24'	61
1 5/8"	1.660	IW (20)	6' to 24'	61
1 5/8"	1.660	IW (40)	6' to 24'	61
2"	1.900	18 (045)	6' to 24'	61
2"	1.900	17 (055)	6' to 24'	61
2"	1.900	16 (065)	6' to 24'	61
2"	1.900	IW (20)	6' to 24'	61
2"	1.900	IW (40)	6' to 24'	61
2 1/2"	2.375	18 (045)	6' to 24'	37
2 1/2"	2.375	17 (055)	6' to 24'	37
2 1/2"	2.375	16 (065)	6' to 24'	37
2 1/2"	2.375	IW (20)	6' to 24'	37
3"		18 (045)	6' to 24'	
3"		17 (055)	6' to 24'	
3"		16 (065)	6' to 24'	
3"		IW (20)	6' to 24'	
4"		18 (045)	6' to 24'	
4"		17 (055)	6' to 24'	
4"		16 (065)	6' to 24'	
4"		IW (20)	6' to 24'	