



## Solidlock's unique fixed-knot system cannot be penetrated!



**SOLIDLOCK** fencing is designed specifically for wildlife. Here is the ultimate in fencing for all animals, large or small, wild or domestic. **SOLIDLOCK**, a North American product, gives excellent control for animal containment, exclusion and protection from predators.

**SOLIDLOCK** high tensile fencing is the best of its kind. Exceeding Class 3 galvanization assures **three times** the life over conventional farm fencing. The combination of high tensile wire (which provides **four times** the strength of conventional 12-1/2 Ga. wire) and solid vertical stays allows fence installation **using 25' post centers**. Available in 330' rolls, and up to a full 8' in height, **SOLIDLOCK** significantly reduces installation costs.

The unique **SOLIDLOCK** knot, which locks vertical and horizontal wires together, won't allow animals to penetrate. The deep crimp in the horizontal wire maintains fence tension and allows the fence to follow rough terrain.

### Fixed-Knot Specifications

WIRE	GAUGE	TENSILE STRENGTH	BREAKING LOAD	GALVANIZATION
Line Wires	12 1/2 ga.	Hi-Tensile 179K - 210K	1350 lbs - 1548 lbs	.85 oz. - 1.4 oz. per sq. ft.
Stay Wires	12 1/2 ga.	Med-Tensile 125K - 145K	943 lbs - 1094 lbs	.85 oz. - 1.4 oz. per sq. ft.
Knot Wires	13 ga.	Low Tensile 62K - 76K	377 lbs - 462 lbs	.85 oz. - 1.4 oz. per sq. ft.

### Order Nomenclature



# WIRE	NOMENCLATURE	WEIGHT	NOMENCLATURE	WEIGHT
20	20/96/6	386	20/96/12	276
17	17/96/6	346	17/96/12	243
18	18/86/6	346	18/86/12	247
17	17/75/6	318	17/75/12	229
15	15/61/6	273	15/61/12	199
10	10/60/6	205	10/60/12	144
12	12/48/6	216	12/48/12	158
9	9/49/6	177	9/49/12	126

#### ORDER NOMENCLATURE


The first two numbers indicate the number of horizontal wires, while the second two numbers indicate the height of the fence. The last number is the distance between vertical stays. Example: 20/96/12 is a roll with 20 horizontal wires, is 96" high, with vertical stays 12" apart.

### Installation Tools for High Tensile Fence

Available for Rent or Purchase



### Examples of Line Wire Spacing

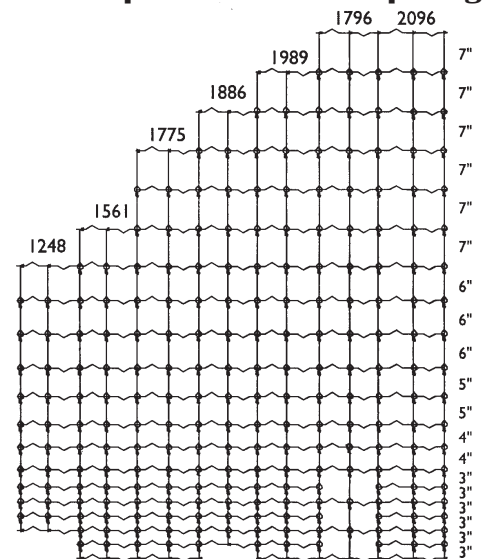

FOR ALL YOUR FENCING NEEDS!

63 Third Avenue, Bay Shore, NY 11706

1-800-847-7789 631-968-6828 Fax: 631-968-6928

www.waysidefence.com

e-mail sales@waysidefence.com